




TW-441-280

Technical Data Sheet

**Towel Dispenser and Waste Receptacle
Recessed Mounted**

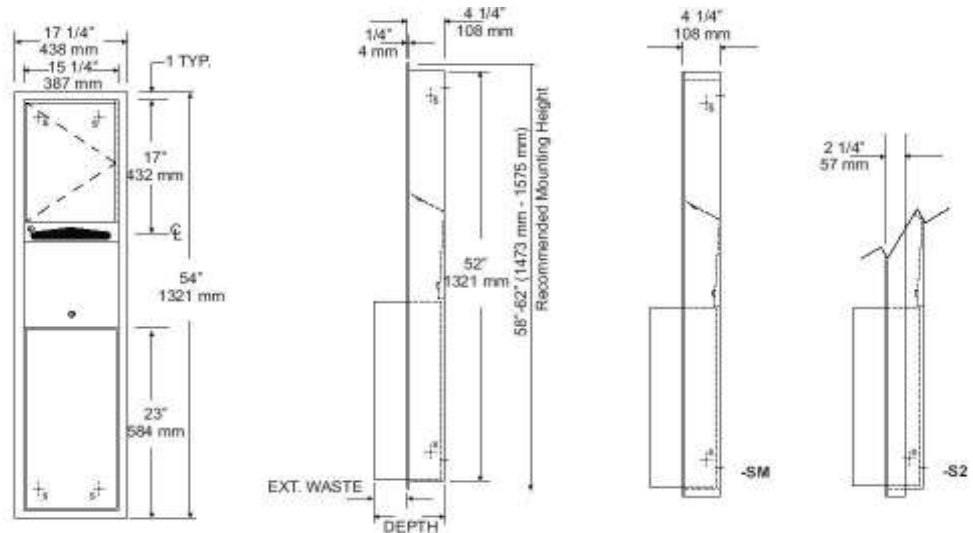

MATERIALS: Towel dispenser, door, frame, waste container and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge All exposed surfaces to be No. 4 satin finish.

SPECIFICATIONS: Paper Towel Dispenser and Waste Receptacle holds and dispenses 800 standard multi-fold or 600 standard C-fold paper towels and will have a waste capacity of 12 gal (46 L). Towel dispenser, door, frame, waste container and cabinet shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge All exposed surfaces to be No. 4 satin finish. Towel dispensing slot shall have a fully hemmed-in rolled edge for snag-free dispensing and user safety. The door to be fabricated in double-pan construction with fiberboard filler and shall be attached to cabinet at side with a full length 3/16" diameter, stainless steel multi-staked piano hinge and be held closed with a tumbler lock. Waste container will have hemmed edges for safety and will be retained by a tumbler lock.

CAPACITY: 600C-Fold or 800 Multifold Towels
Waste Capacity is 12 gallons (46 L)

OVERALL SIZE: 17 1/4" W x 54" H x 8 1/4" D
(438 mm W x 1372 mm H x 210 mm D)

WALL OPENING: 15 3/4" W x 52 1/2" H x 4 1/4" D
(400 mm W x 1334 mm H x 108 mm D)

INSTALLATION: Coordinate installation with architect and contractor to avoid interference with pipes, vents, etc.. Provide a rough wall opening 15 3/4" W x 52 1/2" H x 4" D. If collar is required, slide collar over the back before installing into wall. Remove waste from cabinet and mount unit plumb and true in opening with proper fasteners per application. Secure waste in cabinet and load paper towels.

The manufacturer reserves the right, without formal notification, to implement changes to the design and dimensions.
© 2008 Columbia Accessories
Edition: TW-441-280/001



PO Box 181, Columbia, SC 29202
Phone: 1-866-820-3579 Fax: 1-866-317-2786
Web Site: <http://www.natpart.com>