




SD-558-200

Technical Data Sheet

Liquid Soap Dispenser
Surface Mounted - (Push-Up Type)

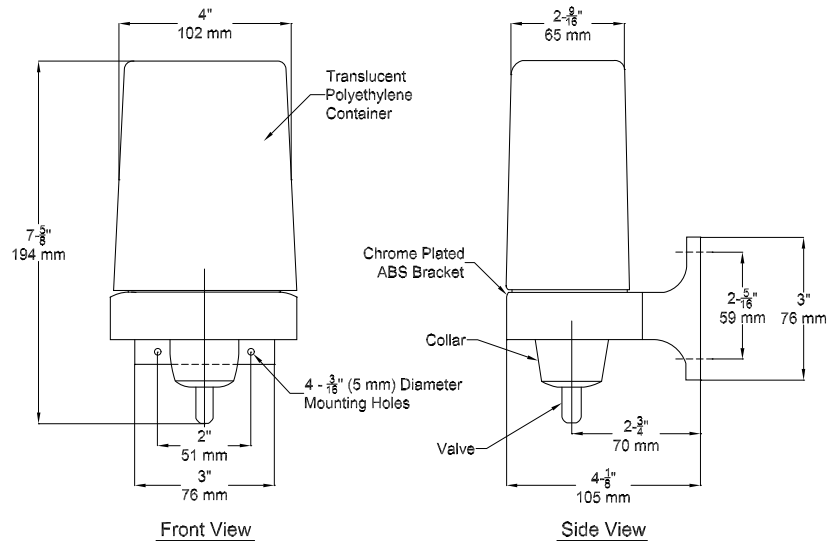

MATERIALS: (Push-up type) unit is fabricated of tamper resistant, chrome plated ABS plastic, a translucent white polyethylene soap container, and a corrosion resistant ABS dispensing valve with stainless steel spring.

CAPACITY: 32 oz (.95 liter) of soap, detergent or lotion

OVERALL SIZE: 4" W x 7 5/8" H x 4 1/8" D
(102 mm W x 194 mm H x 105 mm D)

SPECIFICATIONS: Surface Mounted Liquid Soap Dispenser (Push-up type) dispenses 32 oz (.95 liter) of soap, detergent or lotion. Unit will be fabricated of tamper resistant, chrome plated ABS plastic, a translucent white polyethylene soap container, and a corrosion resistant ABS dispensing valve with a stainless steel spring. Valve operation will comply with ADA Accessibility Guidelines by requiring no more than 5 lbs./sf (22.2 Newton) pressure to actuate and require no grasping or twisting by operator.

INSTALLATION: Unit is secured to wall or partition using No10 self-tapping screws (supplied). For maximum usability and compliance with ADA Accessibility Guidelines, unit should be installed so that valve is 54" (1371mm) maximum above finished floor (AFF) when clear side access is provided; 48" (1219mm) AFF with forward reach access only provided and 46" (1168mm) with side reach over an obstruction such as a vanity. Recommended installation is 42" (1066 mm) AFF or 6" (152mm) minimum above basin.

The manufacturer reserves the right, without formal notification, to implement changes to the design and dimensions.
© 2008 Columbia Accessories
Edition: SD-558-200/001



PO Box 181, Columbia, SC 29202
Phone: 1-866-820-3579 Fax: 1-866-317-2786
Web Site: <http://www.natpart.com>